

TELESCOPIC CYLINDERS



www.hydrex.com.tr



INDEX



Front-End Cylinder With Piston Eye	3
Front-End Cylinder With Piston Eye And Bottom Trunnion	5
Front-End Cylinder With Piston Eye And Bottom Eye	11
Front-End Cylinder With Piston Eye And Bottom Long Eye	12
Front-End Cylinder With Outer Cover	26
Underbody Yipping Telescopic Cylinder	43
Rear Door Cylinder (Forked Head)	50
Rear Door Cylinder (Eye Head)	52
Connectors	59
<i>Chassis Bracket</i>	60
<i>Top Braket</i>	71
<i>Cradle For Ucb Cylinder</i>	72

FRONT-END CYLINDER WITH PISTON EYE

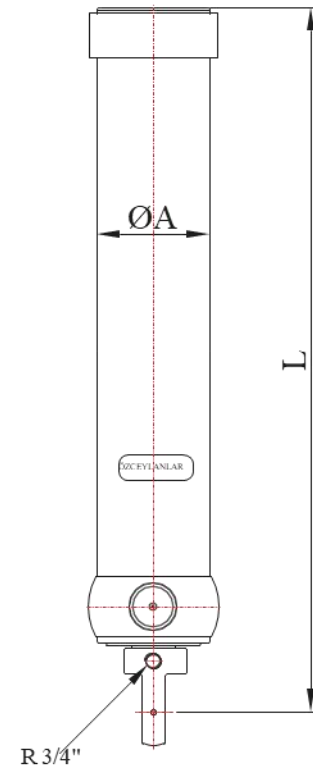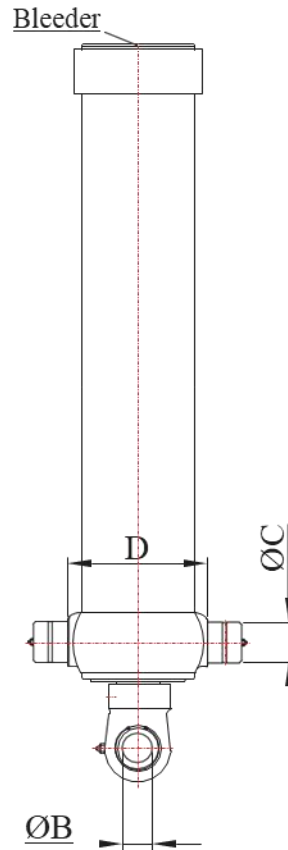



ORDERCODE Single Acting Type	ORDERCODE Double Acting Type	Body O.D.(A)	Closed Length (L)	Total Stroke	B	C	D	Max. Thrust First Stage(180 Bar)	Cylinder Weight
T09-1-0001	T09-1-0017	140 mm	1167 mm	2550 mm	50 mm	55 mm	177 mm	20 ton	105 kg
T09-1-0002	T09-1-0018	140 mm	1317 mm	3000 mm	50 mm	55 mm	177 mm	20 ton	118 kg
T09-1-0003	T09-1-0019	165 mm	1467 mm	3270 mm	50 mm	65 mm	204 mm	28 ton	173 kg
T09-1-0004	T09-1-0020	190 mm	1467 mm	3240 mm	50 mm	68 mm	234 mm	39 ton	222 kg
T09-1-0005	T09-1-0021	165 mm	1617 mm	3660 mm	50 mm	65 mm	204 mm	28 ton	190 kg
T09-1-0006	T09-1-0022	190 mm	1617 mm	3660 mm	50 mm	68 mm	234 mm	39 ton	245 kg
T09-1-0007	T09-1-0023	140 mm	1167 mm	3395 mm	50 mm	55 mm	177 mm	20 ton	117 kg
T09-1-0008	T09-1-0024	165 mm	1167 mm	3400 mm	50 mm	65 mm	204 mm	28 ton	151 kg
T09-1-0009	T09-1-0025	190 mm	1167 mm	3400 mm	50 mm	68 mm	234 mm	39 ton	194 kg
T09-1-0010	T09-1-0026	165 mm	1317 mm	3880 mm	50 mm	65 mm	204 mm	28 ton	167 kg
T09-1-0011	T09-1-0027	190 mm	1317 mm	3880 mm	50 mm	68 mm	234 mm	39 ton	219 kg
T09-1-0012	T09-1-0028	165 mm	1467 mm	4360 mm	50 mm	65 mm	204 mm	28 ton	186 kg
T09-1-0013	T09-1-0029	190 mm	1467 mm	4330 mm	50 mm	68 mm	234 mm	39 ton	241 kg
T09-1-0014	T09-1-0030	190 mm	1467 mm	5415 mm	50 mm	68 mm	234 mm	39 ton	253 kg
T09-1-0015	T09-1-0031	215 mm	1467 mm	5390 mm	50 mm	68 mm	260 mm	52 ton	314 kg
T09-1-0016	T09-1-0032	243 mm	1477 mm	5360 mm	50 mm	68 mm	290 mm	69 ton	380 kg

FRONT-END CYLINDER WITH PISTON EYE AND BOTTOM TRUNNION

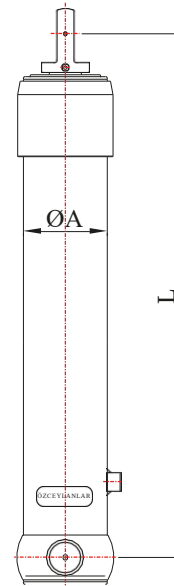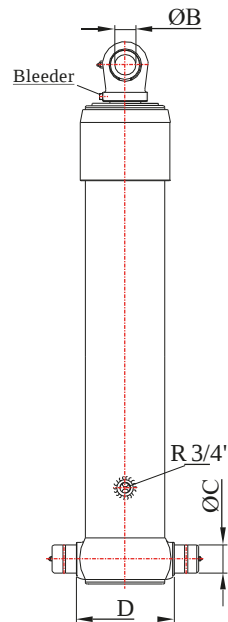


ORDER CODE Single Acting Type	ORDER CODE Double Acting Type	Body O.D. (A)	Closed Length (L)	Total Stroke	B	C	D	Max. Thrust First Stage(180 Bar)	Cylinder Weight
T09-1-0033	T09-1-0056	140 mm	1085 mm	2550 mm	50 mm	55 mm	177 mm	20 ton	100 kg
T09-1-0034	T09-1-0057	140 mm	1235 mm	3000 mm	50 mm	55 mm	177 mm	20 ton	114 kg
T09-1-0035	T09-1-0058	165 mm	1380 mm	3270 mm	50 mm	65 mm	204 mm	28 ton	176 kg
T09-1-0036	T09-1-0059	190 mm	1380 mm	3240 mm	50 mm	68 mm	234 mm	39 ton	221 kg
T09-1-0037	T09-1-0060	165 mm	1530 mm	3660 mm	50 mm	65 mm	204 mm	28 ton	191 kg
T09-1-0038	T09-1-0061	190 mm	1530 mm	3660 mm	50 mm	68 mm	234 mm	39 ton	245 kg
T09-1-0039	T09-1-0062	140 mm	1085 mm	3395 mm	50 mm	55 mm	177 mm	20 ton	112 kg
T09-1-0040	T09-1-0063	165 mm	1080 mm	3400 mm	50 mm	65 mm	204 mm	28 ton	153 kg
T09-1-0041	T09-1-0064	190 mm	1080 mm	3400 mm	50 mm	68 mm	234 mm	39 ton	193 kg
T09-1-0042	T09-1-0065	165 mm	1230 mm	3880 mm	50 mm	65 mm	204 mm	28 ton	170 kg
T09-1-0043	T09-1-0066	190 mm	1230 mm	3880 mm	50 mm	68 mm	234 mm	39 ton	217 kg
T09-1-0044	T09-1-0067	165 mm	1380 mm	4360 mm	50 mm	65 mm	204 mm	28 ton	187 kg
T09-1-0045	T09-1-0068	190 mm	1380 mm	4330 mm	50 mm	68 mm	234 mm	39 ton	238 kg
T09-1-0046	T09-1-0069	190 mm	1227 mm	4850 mm	50 mm	68 mm	234 mm	39 ton	235 kg
T09-1-0047	T09-1-0070	215 mm	1525 mm	5650 mm	50 mm	68 mm	260 mm	52 ton	334 kg
T09-1-0048	T09-1-0071	243 mm	1550 mm	5650 mm	50 mm	68 mm	290 mm	69 ton	415 kg
T09-1-0049	T09-1-0072	190 mm	1380 mm	5415 mm	50 mm	68 mm	234 mm	39 ton	251 kg
T09-1-0050	T09-1-0073	215 mm	1380 mm	5390 mm	50 mm	68 mm	260 mm	52 ton	314 kg
T09-1-0051	T09-1-0074	243 mm	1390 mm	5400 mm	50 mm	68 mm	290 mm	69 ton	390 kg
T09-1-0052	T09-1-0075	215 mm	1625 mm	6150 mm	50 mm	68 mm	260 mm	52 ton	352 kg
T09-1-0053	T09-1-0076	243 mm	1650 mm	6150 mm	50 mm	68 mm	290 mm	69 ton	438 kg
T09-1-0054	T09-1-0077	215 mm	1725 mm	6495 mm	50 mm	68 mm	260 mm	52 ton	374 kg
T09-1-0055	T09-1-0078	243 mm	1735 mm	6540 mm	50 mm	68 mm	290 mm	69 ton	466 kg

FRONT-END CYLINDER WITH PISTON EYE AND BOTTOM EYE

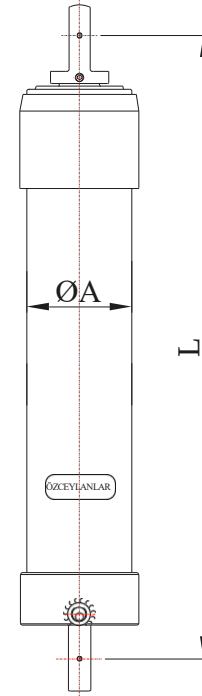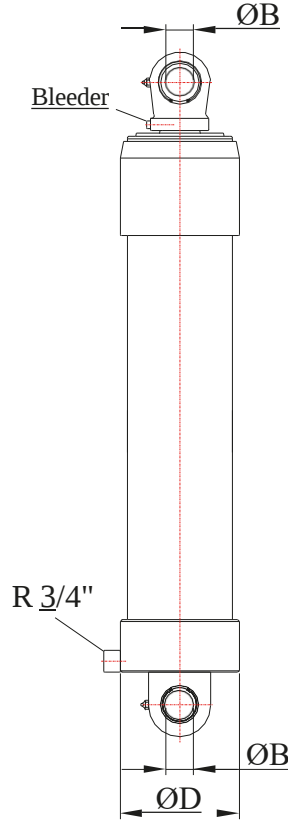


ORDERCODE Single Acting Type	ORDERCODE Double Acting Type	Body O.D.(A)	Closed Length (L)	Total Stroke	B	C	D	Max. Thrust First Stage(180 Bar)	Cylinder Weight
T09-1-0079	T09-1-0097	140 mm	1195 mm	2550 mm	50 mm		165 mm	20 ton	100 kg
T09-1-0080	T09-1-0098	140 mm	1345 mm	3000 mm	50 mm		165 mm	20 ton	114 kg
T09-1-0081	T09-1-0099	165 mm	1495 mm	3270 mm	50 mm		190 mm	28 ton	173 kg
T09-1-0082	T09-1-0100	190 mm	1500 mm	3240 mm	50 mm		217 mm	39 ton	215 kg
T09-1-0083	T09-1-0101	165 mm	1645 mm	3660 mm	50 mm		190 mm	28 ton	188 kg
T09-1-0084	T09-1-0102	190 mm	1645 mm	3660 mm	50 mm		217 mm	39 ton	240 kg
T09-1-0085	T09-1-0103	140 mm	1195 mm	3395 mm	50 mm		165 mm	20 ton	112 kg
T09-1-0086	T09-1-0104	165 mm	1195 mm	3400 mm	50 mm		190 mm	28 ton	150 kg
T09-1-0087	T09-1-0105	190 mm	1200 mm	3400 mm	50 mm		217 mm	39 ton	188 kg
T09-1-0088	T09-1-0106	165 mm	1345 mm	3880 mm	50 mm		190 mm	28 ton	167 kg
T09-1-0089	T09-1-0107	175 mm	1379 mm	3880 mm	50 mm			28 ton	181 kg
T09-1-0090	T09-1-0108	190 mm	1350 mm	3880 mm	50 mm		217 mm	39 ton	210 kg
T09-1-0091	T09-1-0109	165 mm	1495 mm	4360 mm	50 mm		190 mm	28 ton	185 kg
T09-1-0092	T09-1-0110	190 mm	1500 mm	4330 mm	50 mm		217 mm	39 ton	232 kg
T09-1-0093	T09-1-0111	190 mm	1350 mm	4850 mm	50 mm		217 mm	39 ton	230 kg
T09-1-0094	T09-1-0112	190 mm	1500 mm	5415 mm	50 mm		217 mm	39 ton	245 kg
T09-1-0095	T09-1-0113	215 mm	1500 mm	5390 mm	50 mm		245 mm	52 ton	310 kg
T09-1-0096	T09-1-0114	243 mm	1500 mm	5405 mm	50 mm		275 mm	69 ton	370 kg

FRONT-END CYLINDER WITH PISTON EYE AND BOTTOM LONG EYE

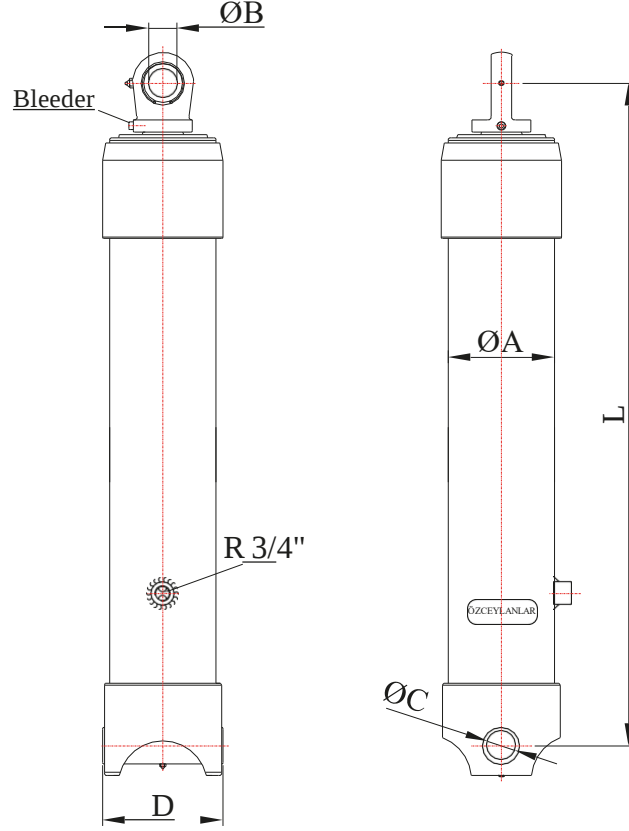


ORDER CODE Single Acting Type	ORDER CODE Double Acting Type	Body O.D.(A)	Closed Length (L)	Total Stroke	B	C	D	Max. Thrust Firs Stage(180 Bar)	Cylinder Weight
T09-1-0115	T09-1-0132	140 mm	1157 mm	2550 mm	50 mm	50,5mm	180 mm	20 ton	98 kg
T09-1-0116	T09-1-0133	140 mm	1307 mm	3000 mm	50 mm	50,5mm	180 mm	20 ton	112 kg
T09-1-0117	T09-1-0134	165 mm	1492 mm	3270 mm	50 mm	50,5mm	215 mm	28 ton	175 kg
T09-1-0118	T09-1-0135	190 mm	1492 mm	3240 mm	50 mm	50,5mm	215 mm	39 ton	220 kg
T09-1-0119	T09-1-0136	165 mm	1642 mm	3660 mm	50 mm	50,5mm	215 mm	28 ton	191 kg
T09-1-0120	T09-1-0137	190 mm	1642 mm	3660 mm	50 mm	50,5mm	215 mm	39 ton	244 kg
T09-1-0121	T09-1-0138	140 mm	1157 mm	3395 mm	50 mm	50,5mm	180 mm	20 ton	110 kg
T09-1-0122	T09-1-0139	165 mm	1192 mm	3400 mm	50 mm	50,5mm	215 mm	28 ton	152 kg
T09-1-0123	T09-1-0140	190 mm	1192 mm	3400 mm	50 mm	50,5mm	215 mm	39 ton	192 kg
T09-1-0124	T09-1-0141	165 mm	1342 mm	3880 mm	50 mm	50,5mm	215 mm	28 ton	169 kg
T09-1-0125	T09-1-0142	190 mm	1342 mm	3880 mm	50 mm	50,5mm	215 mm	39 ton	215 kg
T09-1-0126	T09-1-0143	165 mm	1492 mm	4360 mm	50 mm	50,5mm	215 mm	28 ton	188 kg
T09-1-0127	T09-1-0144	190 mm	1492 mm	4330 mm	50 mm	50,5mm	215 mm	39 ton	237 kg
T09-1-0128	T09-1-0145	190 mm	1342 mm	4850 mm	50 mm	50,5mm	215 mm	39 ton	233 kg
T09-1-0129	T09-1-0146	190 mm	1492 mm	5415 mm	50 mm	50,5mm	215 mm	39 ton	250 kg
T09-1-0130	T09-1-0147	215 mm	1497 mm	5390 mm	50 mm	60,5mm	250 mm	52 ton	315 kg
T09-1-0131	T09-1-0148	243 mm	1462 mm	5405 mm	50 mm	60,5mm	250 mm	69 ton	370 kg

FRONT-END CYLINDER WITH OUTER COVER

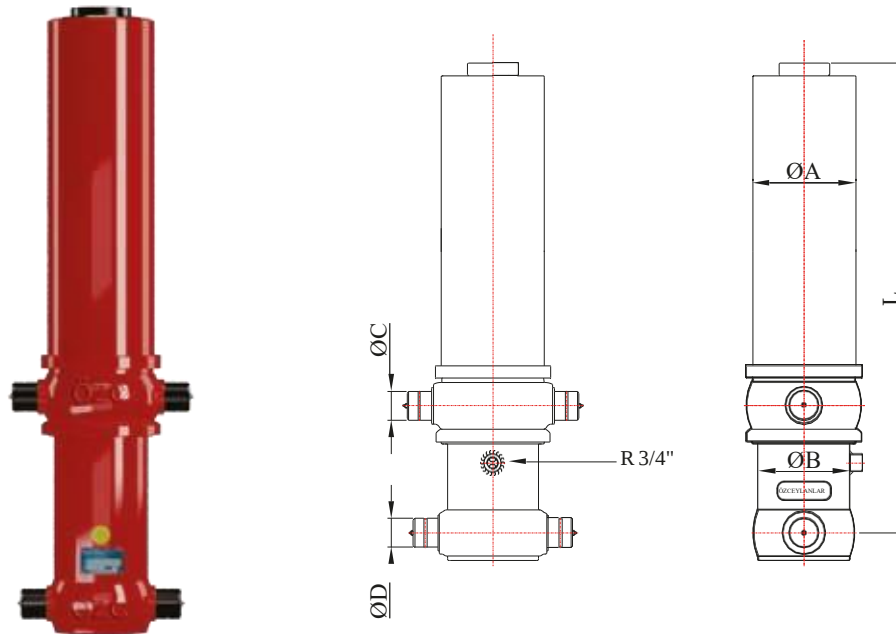


ORDER CODE Single Acting Type	ORDER CODE Double Acting Type	Body O.D.(A)	Closed Length (L)	Total Stroke	B	C	D	Max. Thrust Firs Stage(180 Bar)	Cylinder Weight
T09-1-0149	T09-1-0172	165 mm	1072 mm	2550 mm	140 mm	65 mm	55 mm	20 ton	156 kg
T09-1-0150	T09-1-0173	165 mm	1222 mm	3000 mm	140 mm	65 mm	55 mm	20 ton	177 kg
T09-1-0151	T09-1-0174	190 mm	1372 mm	3270 mm	165 mm	68 mm	65 mm	28 ton	257 kg
T09-1-0152	T09-1-0175	215 mm	1372 mm	3240 mm	190 mm	68 mm	68 mm	39 ton	313 kg
T09-1-0153	T09-1-0176	190 mm	1520 mm	3660 mm	165 mm	68 mm	65 mm	28 ton	281 kg
T09-1-0154	T09-1-0177	215 mm	1520 mm	3660 mm	190 mm	68 mm	68 mm	39 ton	347 kg
T09-1-0155	T09-1-0178	165 mm	1072 mm	3395 mm	140 mm	65 mm	55 mm	20 ton	168 kg
T09-1-0156	T09-1-0179	190 mm	1072 mm	3400 mm	165 mm	68 mm	65 mm	28 ton	218 kg
T09-1-0157	T09-1-0180	215 mm	1072 mm	3400 mm	190 mm	68 mm	68 mm	39 ton	267 kg
T09-1-0158	T09-1-0181	190 mm	1225 mm	3875 mm	165 mm	68 mm	65 mm	28 ton	237 kg
T09-1-0159	T09-1-0182	215 mm	1225 mm	3875 mm	190 mm	68 mm	68 mm	39 ton	299 kg
T09-1-0160	T09-1-0183	190 mm	1372 mm	4360 mm	165 mm	68 mm	65 mm	28 ton	254 kg
T09-1-0161	T09-1-0184	215 mm	1372 mm	4320 mm	190 mm	68 mm	68 mm	39 ton	330 kg
T09-1-0162	T09-1-0185	215 mm	1225 mm	4850 mm	190 mm	68 mm	68 mm	39 ton	318 kg
T09-1-0163	T09-1-0186	243 mm	1472 mm	5650 mm	215 mm	68 mm	68 mm	52 ton	439 kg
T09-1-0164	T09-1-0187	270 mm	1482 mm	5650 mm	243 mm	68 mm	68 mm	69 ton	543 kg
T09-1-0165	T09-1-0188	215 mm	1372 mm	5420 mm	190 mm	68 mm	68 mm	39 ton	339 kg
T09-1-0166	T09-1-0189	243 mm	1372 mm	5385 mm	215 mm	68 mm	68 mm	52 ton	415 kg
T09-1-0167	T09-1-0190	270 mm	1382 mm	5355 mm	243 mm	68 mm	68 mm	69 ton	513 kg
T09-1-0168	T09-1-0191	243 mm	1572 mm	6150 mm	215 mm	68 mm	68 mm	52 ton	465 kg
T09-1-0169	T09-1-0192	270 mm	1582 mm	6150 mm	243 mm	68 mm	68 mm	69 ton	575 kg
T09-1-0170	T09-1-0193	243 mm	1715 mm	6495 mm	215 mm	68 mm	68 mm	52 ton	515 kg
T09-1-0171	T09-1-0194	270 mm	1715 mm	6495 mm	243 mm	68 mm	68 mm	69 ton	612 kg

UNDERBODY YIPPING TELESCOPIC CYLINDER

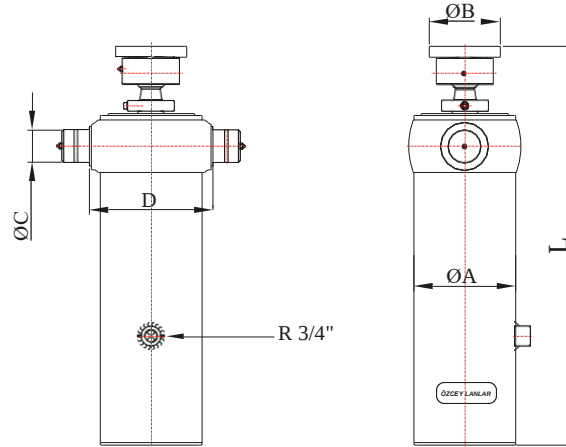


ORDER CODE Single Acting Type	ORDER CODE Double Acting Type	Body O.D.(A)	Closed Length (L)	Total Stroke	B	C	D	Max. Thrust First Stage(180 Bar)	Cylinder Weight
T09-1-0195	T09-1-0200	140 mm	695 mm	1380 mm	150 mm	55 mm	177 mm	20 ton	68 kg
T09-1-0196	T09-1-0201	190 mm	840 mm	2485 mm	150 mm	68 mm	234 mm	39 ton	140 kg
T09-1-0197	T09-1-0202	190 mm	840 mm	2985 mm	150 mm	68 mm	234 mm	39 ton	145 kg
T09-1-0198	T09-1-0203	215 mm	840 mm	2995 mm	150 mm	68 mm	260 mm	52 ton	175 kg
T09-1-0199	T09-1-0204	215 mm	840 mm	3495 mm	150 mm	68 mm	260 mm	52 ton	180 kg

UNDERBODY YIPPING TELESCOPIC CYLINDER

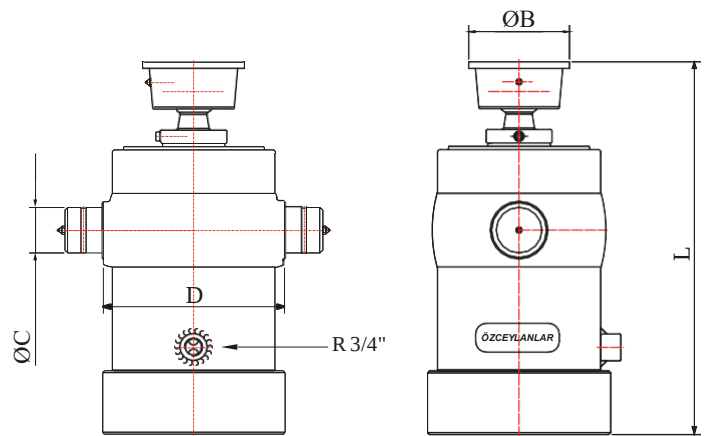


ORDER CODE Single Acting Type	ORDER CODE Double Acting Type	Body O.D.(A)	Closed Length (L)	Total Stroke	B	C	D	Max. Thrust First Stage(180 Bar)	Cylinder Weight
T09-1-0205	T09-1-0206	245 mm	560 mm	1710 mm	150 mm	60 mm	275 mm	69 ton	150 kg

UNDERBODY YIPPING TELESCOPIC CYLINDER

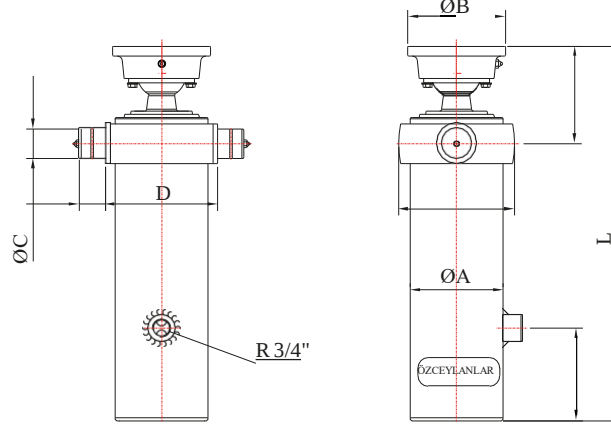



ORDERCODE Single Acting Type	ORDERCODE Double Acting Type	Body O.D.(A)	Closed Length (L)	Total Stroke	B	C	D	Max. Thrust Firs Stage(180 Bar)	Cylinder Weight
T09-1-0207	T09-1-0210	140 mm	570 mm	580 mm	148 mm	45 mm	170 mm	20 ton	50 kg
T09-1-0208	T09-1-0211	140 mm	665 mm	780 mm	148 mm	45 mm	170 mm	20 ton	56 kg
T09-1-0209	T09-1-0212	140 mm	570 mm	870 mm	148 mm	45 mm	170 mm	20 ton	54 kg

UNDERBODY YIPPING TELESCOPIC CYLINDER

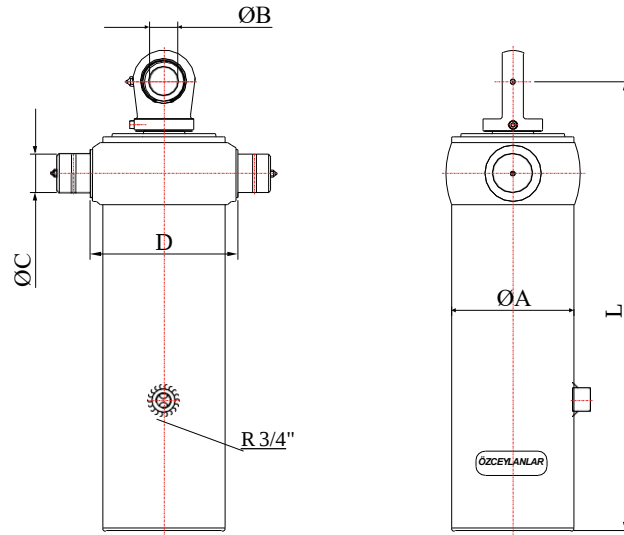



ORDERCODE Single Acting Type	ORDERCODE Double Acting Type	Body O.D.(A)	Closed Length (L)	Total Stroke	B	C	D	Max. Thrust Firs Stage(180 Bar)	Cylinder Weight
T09-1-0221	T09-1-0224	190 mm	795 mm	2485 mm	50 mm	68 mm	234 mm	39 ton	134 kg
T09-1-0222	T09-1-0225	190 mm	795 mm	2985 mm	50 mm	68 mm	234 mm	39 ton	139 kg
T09-1-0223	T09-1-0226	215 mm	795 mm	2995 mm	50 mm	68 mm	260 mm	52 ton	169 kg

UNDERBODY YIPPING TELESCOPIC CYLINDER

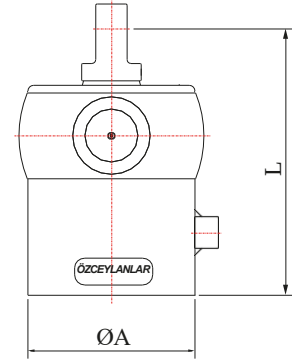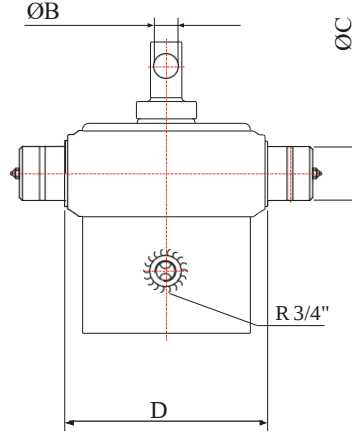


ORDER CODE Single Acting Type	ORDER CODE Double Acting Type	Body O.D.(A)	Closed Length (L)	Total Stroke	B	C	D	Max. Thrust First Stage(180 Bar)	Cylinder Weight
T09-1-0213	T09-1-0217	190 mm	342 mm	615 mm	30,5 mm	68 mm	234 mm	39 ton	57 kg
T09-1-0214	T09-1-0218	215 mm	342 mm	630 mm	30,5 mm	68 mm	260 mm	52 ton	72 kg
T09-1-0215	T09-1-0219	215 mm	342 mm	735 mm	30,5 mm	68 mm	260 mm	52 ton	74 kg
T09-1-0216	T09-1-0220	243 mm	342 mm	735 mm	30,5 mm	68 mm	290 mm	69 ton	94 kg

UNDERBODY YIPPING TELESCOPIC CYLINDER

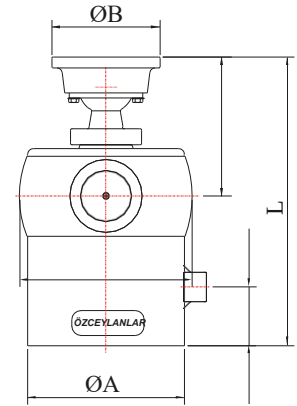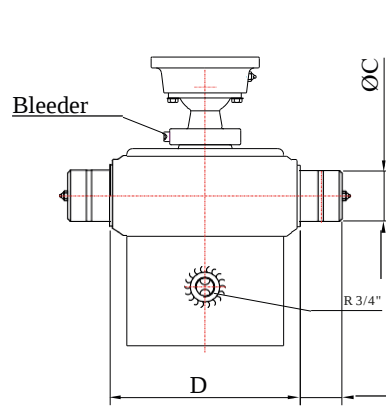


ORDER CODE Single Acting Type	ORDER CODE Double Acting Type	Body O.D.(A)	Closed Length (L)	Total Stroke	B	C	D	Max. Thrust First Stage(180 Bar)	Cylinder Weight
T09-1-0227	T09-1-0230	190 mm	400 mm	615 mm	150 mm	68 mm	234 mm	39 ton	63 kg
T09-1-0228	T09-1-0231	215 mm	400 mm	630 mm	150 mm	68 mm	260 mm	52 ton	78 kg
T09-1-0229	T09-1-0232	215 mm	400 mm	735 mm	150 mm	68 mm	260 mm	52 ton	80 kg

UNDERBODY YIPPING TELESCOPIC CYLINDER

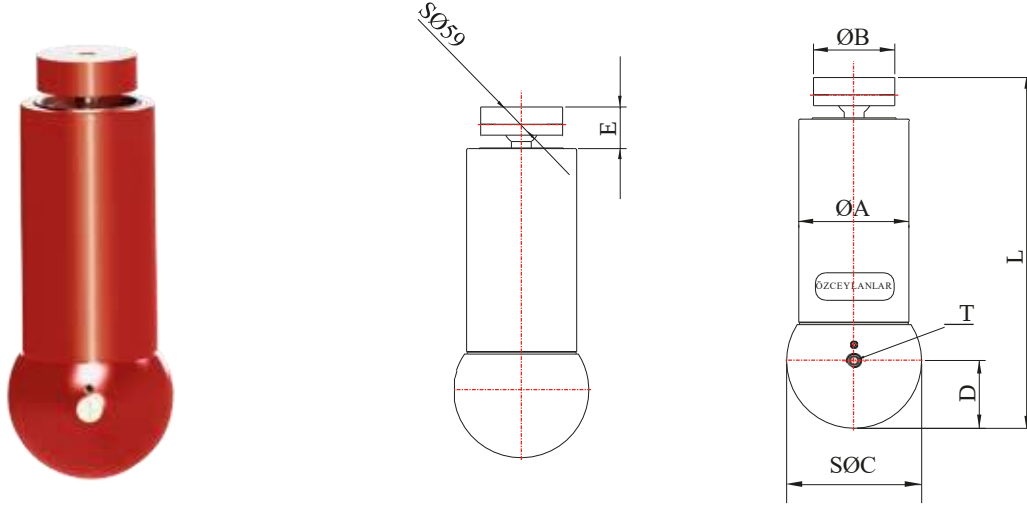



ORDER CODE Single Acting Type	ORDER CODE Double Acting Type	Body O.D.(A)	Closed Length (L)	Total Stroke	B	C	D	Max. Thrust Firs Stage(180 Bar)	Cylinder Weight
T09-1-0233	T09-1-0237	175 mm	590 mm	1655 mm	215 mm	130mm	107,5 mm	28 ton	90 kg
T09-1-0234	T09-1-0238	175 mm	560 mm	1560 mm	215 mm	130mm	107,5 mm	28 ton	87 kg
T09-1-0235	T09-1-0239	205 mm	490 mm	1320 mm	250 mm		125 mm	39 ton	115 kg
T09-1-0236	T09-1-0240	205 mm	520 mm	1320 mm	250 mm	130mm	125 mm	39 ton	118 kg

UNDERBODY YIPPING TELESCOPIC CYLINDER

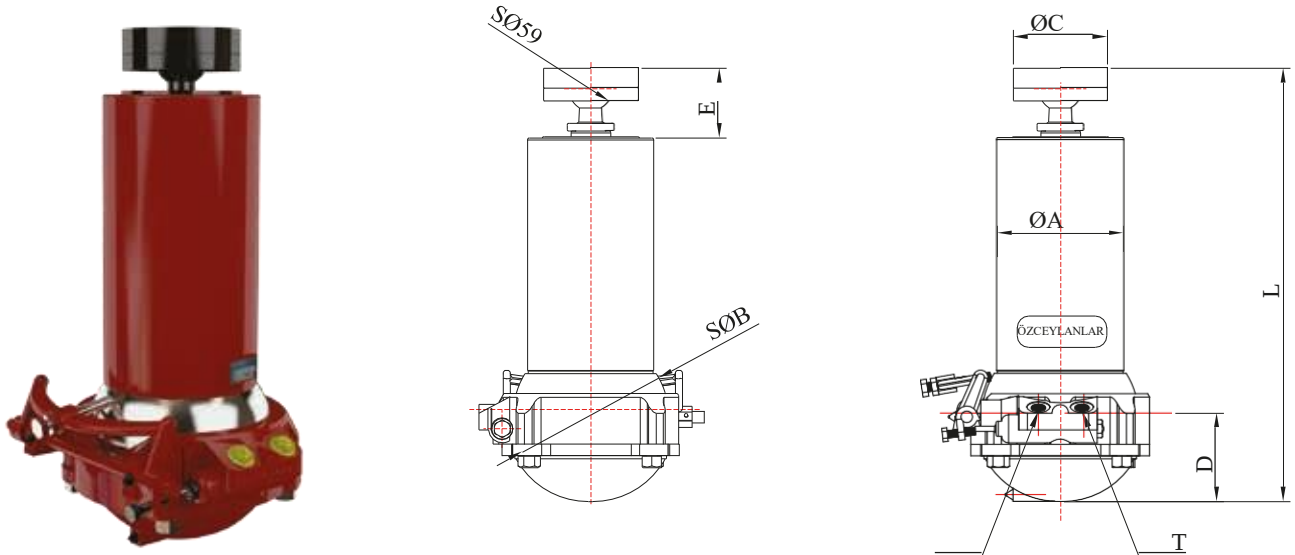



ORDER CODE Single Acting Type	ORDER CODE Double Acting Type	Body O.D.(A)	Closed Length (L)	Total Stroke	B	C	D	Max. Thrust Firs Stage(180 Bar)	Cylinder Weight
T09-1-0247	T09-1-0248	175 mm	600 mm	1655 mm	215 mm	130mm	117,5 mm	28 ton	108 kg

REAR DOOR CYLINDER (FORKED HEAD)

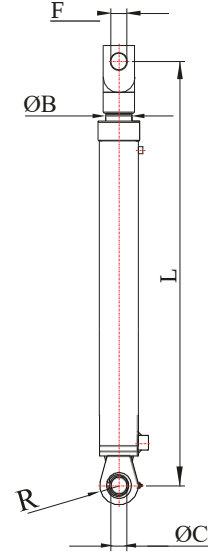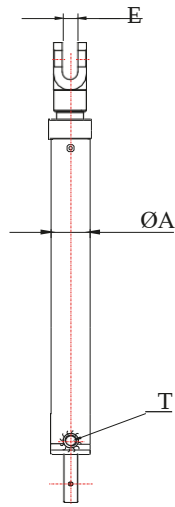

ORDER CODE Single Acting Type	ORDER CODE Double Acting Type	Body O.D.(A)	Closed Length (L)	Total Stroke	B	C	D	Max. Thrust First Stage(180 Bar)	Cylinder Weight
T09-1-0241	T09-1-0244	75 mm	810 mm	510 mm	50 mm	30 mm	61 mm	5 ton	22 kg
T09-1-0242	T09-1-0245	75 mm	910 mm	610 mm	50 mm	30 mm	61 mm	5 ton	26 kg
T09-1-0243	T09-1-0246	75 mm	1010 mm	710 mm	50 mm	30 mm	61 mm	5 ton	30 kg


REAR DOOR CYLINDER (EYE HEAD)

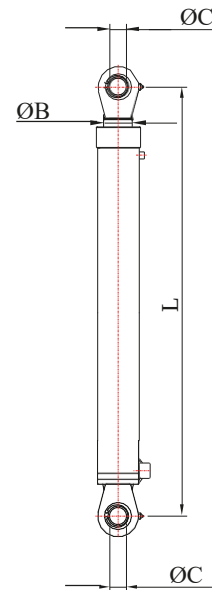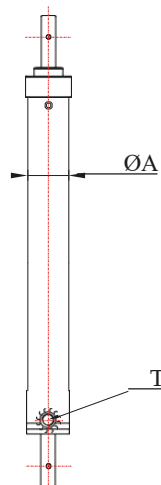


ORDER CODE Single Acting Type	ORDER CODE Double Acting Type	Body O.D.(A)	Closed Length (L)	Total Stroke	B	C	D	Max. Thrust First Stage(180 Bar)	Cylinder Weight
T09-1-0249	T09-1-0252	75 mm	770 mm	510 mm	50 mm	30 mm		5 ton	20 kg
T09-1-0250	T09-1-0253	75 mm	870 mm	610 mm	50 mm	30 mm		5 ton	24 kg
T09-1-0251	T09-1-0254	75 mm	970 mm	710 mm	50 mm	30 mm		5 ton	28 kg

CONNECTORS

www.hydrex.com.tr

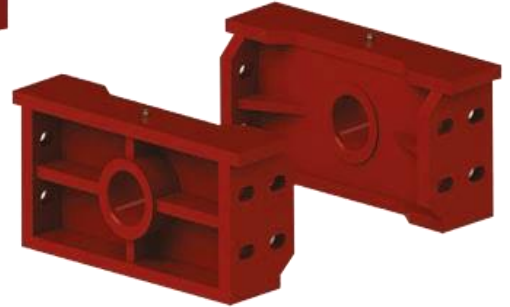


CHASSIS BRACKET

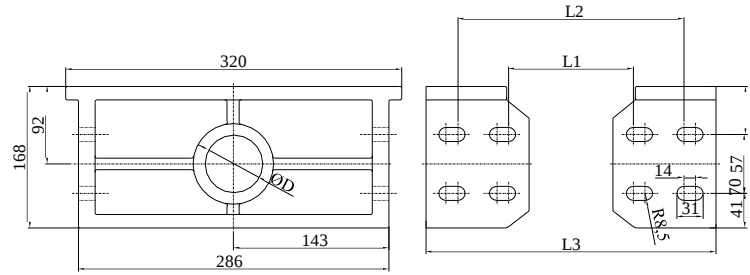


ORDER CODE	Types of cylinders used	ØD	L1	L2	L3	Weight
T09-3-0006	T09-1-0035/T09-1-0037/T09-1-0040/T09-1-0042/T09-1-0044/T09-1-0058/T09-1-0060/T09-1-0063/T09-1-0065/T09-1-0067/T09-1-0151/T09-1-0153/T09-1-0156/T09-1-0158/T09-1-0160/T09-1-0174/T09-1-0176/T09-1-0179/T09-1-0181/T09-1-0183	55,2 mm	135 mm	255 mm	331 mm	30 kg
T09-3-0007	T09-1-0036/T09-1-0038/T09-1-0041/T09-1-0043/T09-1-0045/T09-1-0046/T09-1-0049/T09-1-0059/T09-1-0061/T09-1-0064/T09-1-0066/T09-1-0068/T09-1-0069/T09-1-0072/T09-1-0152/T09-1-0154/T09-1-0157/T09-1-0159/T09-1-0161/T09-1-0162/T09-1-0165/T09-1-0175/T09-1-0177/T09-1-0180/T09-1-0182/T09-1-0184/T09-1-0185/T09-1-0188	65,2 mm	162 mm	282 mm	358 mm	30 kg
T09-3-0008	T09-1-0047/T09-1-0050/T09-1-0052/T09-1-0054/T09-1-0070/T09-1-0073/T09-1-0075/T09-1-0077/T09-1-0163/T09-1-0166/T09-1-0168/T09-1-0170/T09-1-0186/T09-1-0189/T09-1-0191/T09-1-0193	68,2 mm	192 mm	312 mm	388 mm	30 kg

CHASSIS BRACKET

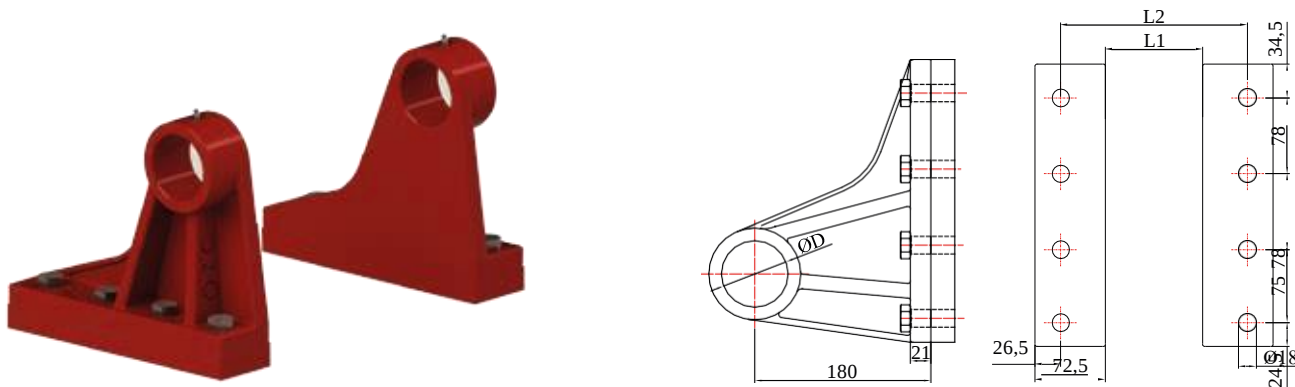


ORDER CODE	Types of cylinders used	ØD	L1	L2	Weight
T09-3-0016	T09-1-0001/T09-1-0002/T09-1-0007/T09-1-0017/T09-1-0018/T09-1-0023	55,2	180 mm	272 mm	26 kg
T09-3-0017	T09-1-0003/T09-1-0005/T09-1-0008/T09-1-0010/T09-1-0012/T09-1-0019/T09-1-0021/T09-1-0024/T09-1-0026/T09-1-0028/T09-1-0149/T09-1-0150/T09-1-0155/T09-1-0172/T09-1-0173/T09-1-0178	65,2	210 mm	302 mm	26 kg
T09-3-0018	T09-1-0004/T09-1-0006/T09-1-0009/T09-1-0011/T09-1-0013/T09-1-0014/T09-1-0020/T09-1-0022/T09-1-0025/T09-1-0027/T09-1-0029/T09-1-0030/T09-1-0151/T09-1-0153/T09-1-0156/T09-1-0158/T09-1-0160/T09-1-0174/T09-1-0176/T09-1-0179/T09-1-0181/T09-1-0183	68,2	240 mm	332 mm	26 kg
T09-3-0019	T09-1-0015/T09-1-0031/T09-1-0152/T09-1-0154/T09-1-0157/T09-1-0159/T09-1-0161/T09-1-0162/T09-1-0165/T09-1-0175/T09-1-0177/T09-1-0180/T09-1-0182/T09-1-0184/T09-1-0185/T09-1-0188	68,2	265 mm	357 mm	26 kg
T09-3-0020	T09-1-0016/T09-1-0032/T09-1-0163/T09-1-0166/T09-1-0168/T09-1-0170/T09-1-0186/T09-1-0189/T09-1-0191/T09-1-0193	68,2	295 mm	387 mm	26 kg
T09-3-0021	T09-1-0164/T09-1-0167/T09-1-0169/T09-1-0171/T09-1-0187/T09-1-0190/T09-1-0192/T09-1-0194	68,2	325 mm	417 mm	26 kg

TOP BRAKET

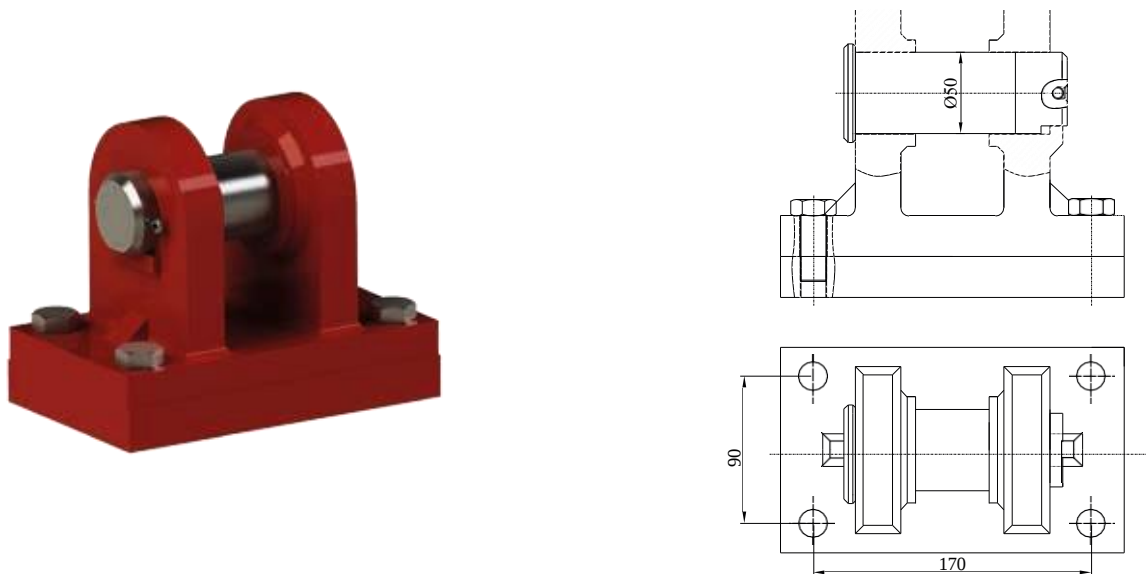



ORDER CODE	Types of cylinders used	ØD	L1	L2	L3	Weight
T09-3-0025	T09-1-0033 - - T09-1-0148	50 mm				16 kg

CHASSIS BRACKET

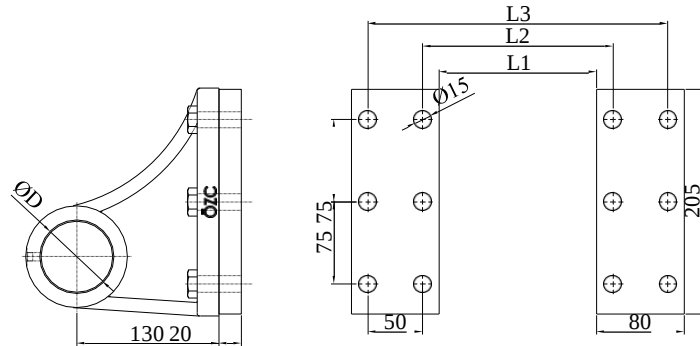



ORDER CODE	Types of cylinders used	ØD	L1	L2	L3	Weight
T09-3-0022	T09-1-0001/T09-1-0002/T09-1-0007/T09-1-0017/T09-1-0018/T09-1-0023	55,2 mm	180 mm	210 mm	310 mm	17kg
T09-3-0023	T09-1-0003/T09-1-0005/T09-1-0008/T09-1-0010/T09-1-0012/T09-1-0019/T09-1-0021/T09-1-0024/T09-1-0026/T09-1-0028/T09-1-0149/T09-1-0150/T09-1-0155/T09-1-0172/T09-1-0173/T09-1-0178	65,2 mm	210 mm	240 mm	340 mm	17kg
T09-3-0024	T09-1-0004/T09-1-0006/T09-1-0009/T09-1-0011/T09-1-0013/T09-1-0014/T09-1-0020/T09-1-0022/T09-1-0025/T09-1-0027/T09-1-0029/T09-1-0030/T09-1-0151/T09-1-0153/T09-1-0156/T09-1-0158/T09-1-0160/T09-1-0174/T09-1-0176/T09-1-0179/T09-1-0181/T09-1-0183	68,2 mm	240 mm	270 mm	370 mm	17kg

CRADLE FOR UCB CYLINDER

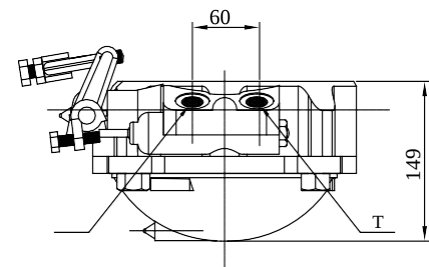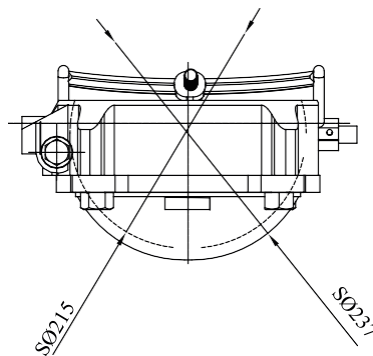



ORDER CODE	Types of cylinders used	Oil inlet diameter (T)	Oil inlet output (T)	Maximum working pressure	Weight
T09-3-0026	T09-1-0233/T09-1-0234/T09-1-0237/T09-1-0238	M22x1,5	M22x1,5	190 bar	14 kg

CRADLE FOR UCB CYLINDER

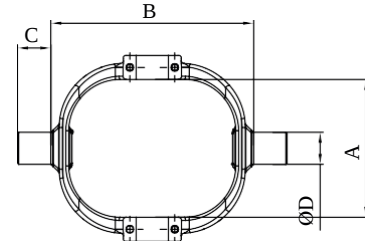

ORDER CODE	Types of cylinders used	A	B	C	ØD	F	G	H°
T09-3-0027	T09-1-0195/T09-1-0200/T09-1-0207/T09-1-0208/T09-1-0209/T09-1-0210/T09-1-0211/T09-1-0212	185	290	60	55	37,5	130	60
T09-3-0028	T09-1-0205/T09-1-0206/T09-1-0216/T09-1-0220	295	395	60	68	55	220	60
T09-3-0029	T09-1-0195/T09-1-0200/T09-1-0207/T09-1-0208/T09-1-0209/T09-1-0210/T09-1-0211/T09-1-0212	175	230	45	45	25	105	60

CRADLE FOR UCB CYLINDER

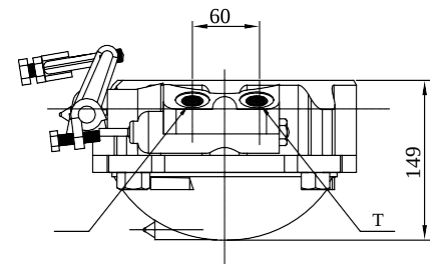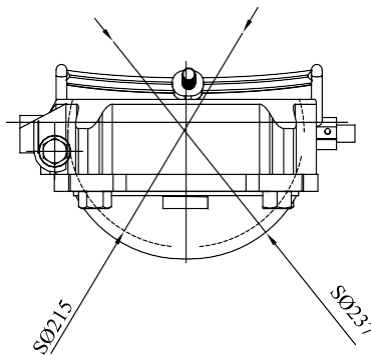

ORDER CODE	Types of cylinders used	Oil inlet diameter (T)	Oil inlet output (T)	Maximum working pressure	Weight
T09-3-0026	T09-1-0233/T09-1-0234/T09-1-0237/T09-1-0238	M22x1,5	M22x1,5	190 bar	14 kg

HYDREX

A.O.S.B. 10.000 Sokak No.22
Çiğli / İzmir / Türkiye
Tel: +90 232 376 79 99
Fax: +90 232 376 80 78

sales@hyrex.com.tr
info@hyrex.com.tr

www.hyrex.com.tr

